




# TINMAR INVER

CE

- ✉ info@tinmarinver.com
- 🌐 www.tinmarinver.com
- 📍 C/ De la Farigola, 12  
08755 Castellbisbal  
(Barcelona) SPAIN

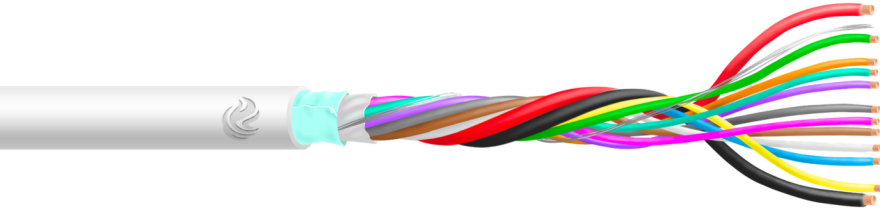

## SEGURFLEX + POWER DATASHEET Z10Z1-K (AS)

Alarm Cable

### Description:

Flexible, halogen-free (LSZH) multicore cable, generally used for security and alarm installations, incorporating power supply cores to reduce the need for multiple cable runs. Features an overall screen to enhance performance against potential interference and crosstalk.

**CPR: B2ca -s1a, d0, a1**

**Reference Number:**

002-1207510 2+10x0.22 mm<sup>2</sup>

**Standards and Compliance:**

UNE EN 50575/A1:2016

UNE EN 60332-1-2

UNE EN 50399:2012

UNE EN 61034-2

UNE EN 60754-2

RoHS Compliant



### PHYSICAL CHARACTERISTICS:

**Conductor:** Class 5 Flexible Copper (IEC 60228)

- **Diameter:** 0.22/0.70 mm<sup>2</sup>

**Insulation:** LSZH EVA Polyolefin

- **0.22 Color:** White, Yellow, Green, Blue, Brown, Grey, Purple, Orange, Pink, Turquoise
- **0.70 Color:** Red, Black
- **Core Diameter:** 1.1/1.3 mm

**Shield:** Aluminum Mylar Tape

**Drain Wire:** Stranded Tinned Copper

**Jacket:** LSZH Polyolefin

- **Color:** White

### ELECTRICAL CHARACTERISTICS:

**Test Voltage:** 2000V DC > 5 Minutes

**Operating Voltage:** 250V

