CONDUITS

TINMAR INVER

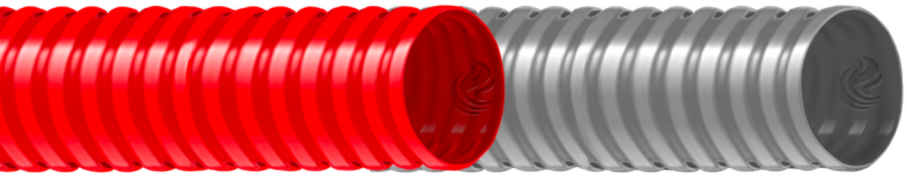

Standards and Compliance:
EN 61386-1
EN 61386-22
RoHS Compliant

CORRUGATED CONDUIT DATASHEET

Pre-installed in corrugated conduit available for all cables.

Description:
Pre-wired corrugated conduit is becoming increasingly popular among installers, as it significantly reduces labor time in cabling installations, such as in raised access floors or suspended ceilings. Due to its safety features, it is ideal for large-scale construction projects and public buildings with a high influx of people.

OTHER AVAILABLE OPTIONS:

Material: LSZH Polyolefin

- **Color:** Red, Black, Blue, Grey

Diameters: 16 mm / 20 mm / 25 mm
Insulation Properties: 500V
Impact Resistance: >2J
Compressive Strength: Aprox. 750 Nw
Operating Temperature: -5ºC/90ºC

This document Is informative, and has no contractual obligation and can be modified without any notification.