




TINMAR INVER



- ✉ info@tinmarinver.com
- 🌐 www.tinmarinver.com
- 📍 C/ De la Farigola, 12
08755 Castellbisbal
(Barcelona) SPAIN

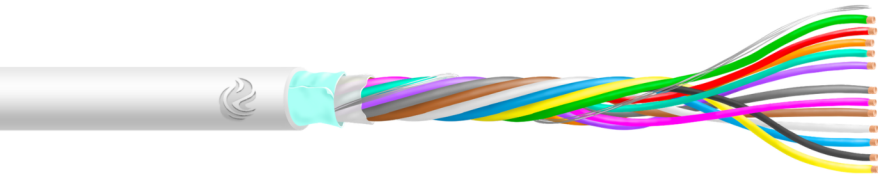

SEGURFLEX DATASHEET Z10Z1-K (AS)

Alarm Cable

Description:

Flexible LSZH multicore cable, generally used for security and alarm installations. Features an overall screen for improved performance against potential interference and crosstalk.

CPR: B2ca -s1a, d0, a1

Reference Number:

002-1202212 12x0.22 mm²

Standards and Compliance:

UNE EN 50575/A1:2016
UNE EN 60332-1-2
UNE EN 50399:2012
UNE EN 61034-2
UNE EN 60754-2
RoHS Compliant



PHYSICAL CHARACTERISTICS:

Conductor: Class 5 Flexible Copper (IEC 60228)

- **Diameter:** 0.22 mm²

Insulation: LSZH EVA Polyolefin

- **0.22 Color:** White, Yellow, Green, Blue, Brown, Grey, Purple, Orange, Pink, Turquoise, Red, Black
- **Core Diameter:** 1.1 mm

Shield: Aluminum Mylar Tape

Drain Wire: Stranded Tinned Copper

Jacket: LSZH Polyolefin

- **Color:** White

ELECTRICAL CHARACTERISTICS:

Test Voltage: 2000V DC > 5 Minutes

Operating Voltage: 250V

